



IS0238E_01 ChiccoUSA.com

If you have any questions regarding this remedy kit or installation instructions please contact Chicco Customer Service at 1-877-424-4226.

MYFIT ZIP AIR RECALL REMEDY INSTRUCTIONS

Keep these instructions for future use; store with the new user guide.

This Remedy Kit is to be used when installing the MyFit Zip Air in the following configuration:


Harness Mode: When installed with a vehicle Lap-Belt ONLY and no Tether Anchor for children weighing between 25 and 40 lbs: Use Recline Positions 1 & 2 ONLY. DO NOT use Recline Positions 3 & 4. DO NOT use Forward Crotch Buckle Position

⚠ WARNINGS

READ ALL INSTRUCTIONS BEFORE USE - Failure to follow these warnings and instructions could result in injury or death to your child.

- **ONLY** install this car seat in recline positions 1 & 2 when using the vehicle lap belt and no top tether for children weighing between 25-40 lbs.
- **ALWAYS** make sure the LATCH connectors are securely attached to the D-rings when not in use.
- Check to make sure the LATCH straps lay flat and are snug against the sides of the child restraint when stored.

THIS REMEDY KIT INCLUDES:




D-ring Strap x2

**Replacement
User Guide x1**




Important: Discard the original user guide (IS0176E_02) and replace with the included user guide.

STEP 1

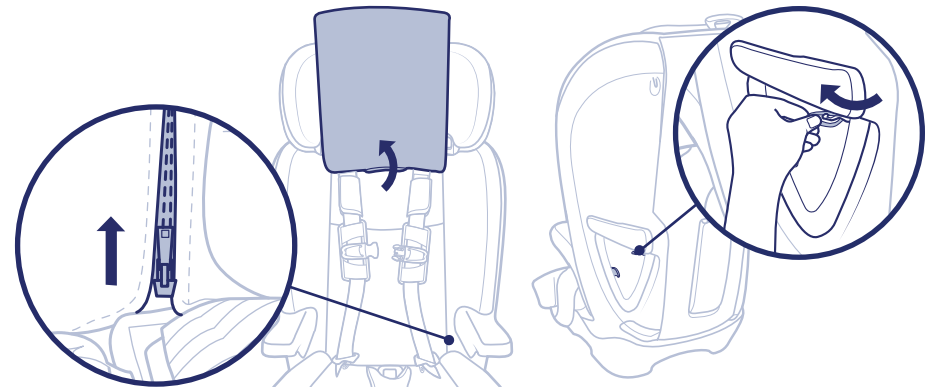


1a. Unbuckle the Chest Clip and lift the Zip-On Head Rest Pad up. Then unzip the side of the Seat Pad. Un-hook the elastic strap from the top hook.

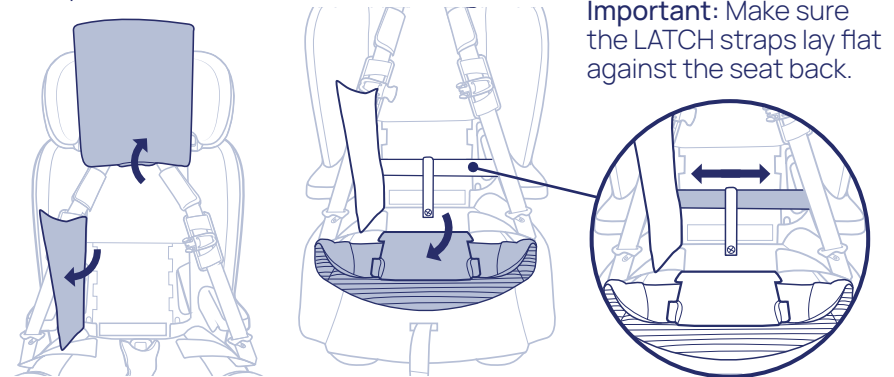

Important: Make sure the LATCH straps lay flat against the seat back.

1b. Lift up on the seat back pad and fold the back padding out of the way. Pull forward on the bottom seat pad and storage cover, to locate the LATCH storage compartment. Remove both of the LATCH Straps.




Important: The SuperCinch® LATCH Tightener strap (Pull 2nd) and LATCH Adjuster strap (Pull 1st) should be extended to their full length.


1c. Thread the LATCH Connectors behind the seat fabric and out the side openings on the seat back, as shown.

1d. Repeat step 1a in REVERSE to close the LATCH Connector Storage and replace all the seat pads.


STEP 2

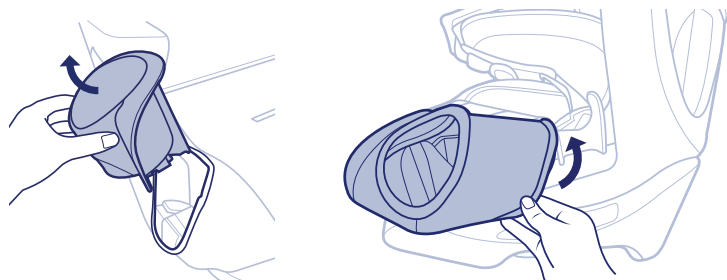

2a. Press the button on the bottom of the Cup Holder and lift up to remove. Then lift the padding off the bottom edge of the Cup Holder frame. Repeat this step for the other side.

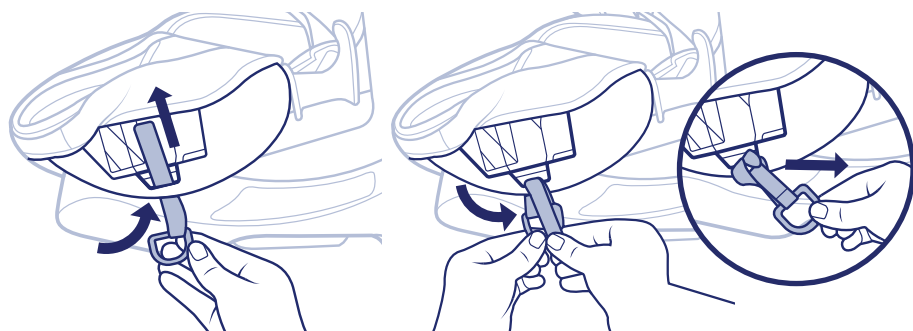

2b. Take one D-ring strap, slide the strap behind and through the cutout in the car seat. Open the loop and thread the D-ring through. Pull the D-ring down tightly and slide it towards the back of the car seat. Repeat Step 2b for the opposite side.

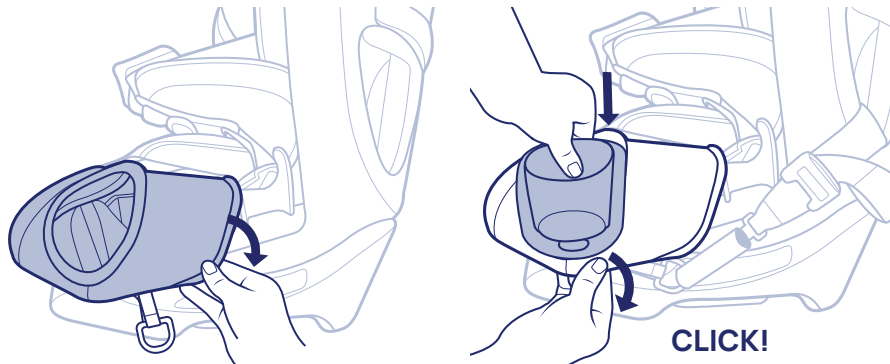


2c. Replace the seat pad around the bottom of the Cup Holder frame. Make sure the D-ring is outside of the seat pad. Repeat this step for the other side.

2d. Re-attach **BOTH** Cup Holders. You may need to pull down on the bottom edge of the seat pad, while pushing down on the Cup Holder.

CLICK!

STEP 3

Important: Make sure the red button on the LATCH button is facing out and there are no twists in the straps.

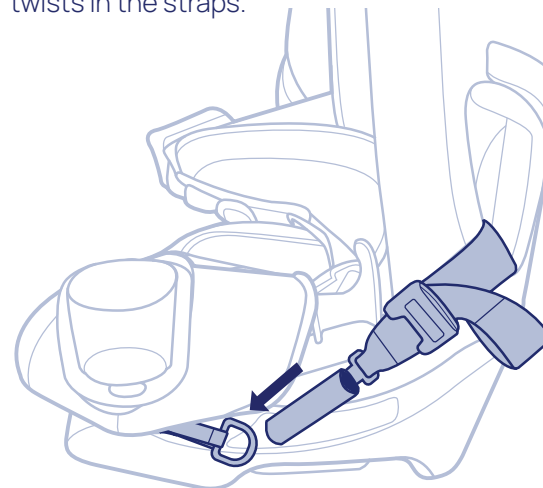


CLICK!

3. Make sure the red button on the LATCH is facing out and connect the LATCH to the D-ring. Repeat Step 3 for the opposite side so **BOTH** LATCH straps are connected to the D-rings.

STEP 4

Important: DO NOT over tighten the LATCH straps.

4a. Pull LATCH Adjuster strap (**Pull 1st**) to snug it against the car seat. The excess strap can be tucked behind the LATCH Connector and the car seat.

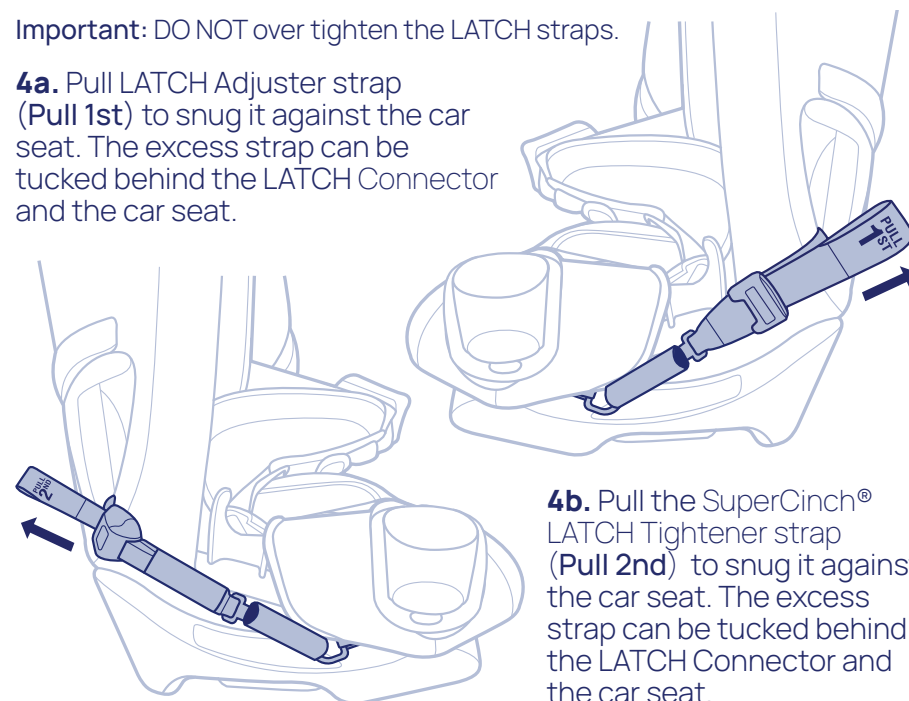

4b. Pull the SuperCinch® LATCH Tightener strap (**Pull 2nd**) to snug it against the car seat. The excess strap can be tucked behind the LATCH Connector and the car seat.